


GOVERNOR ROPES

6X19

Wire Rope with Polypropylene Core
6 Strands
Seale

BRUGG
Lifting

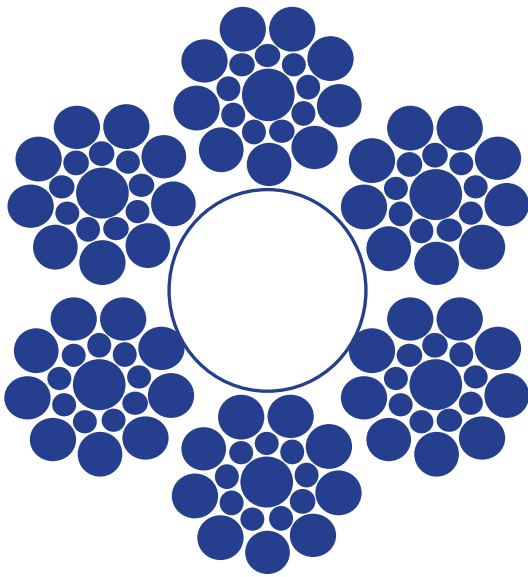

For high demands on elongation and corrosion protection with special rope lubrication

Elastic elongation

Permanent elongation

0.084%

0.22%

item number	rope ø		breaking load min.		weight		construction
	mm	in	kN	lbs	kg/100m	lb/ft	
29463	6.0	–	24,40	5485	12,30	0,083	6x19S-SFC 1960 B sZ (RRL)
03901	6.5	–	28,20	6340	14,36	0,096	6x19S-SFC 1960 B sZ (RRL)

Further nominal strengths and/or diameters (including imperial dimensions) on request. Rope diameter-tolerances according to EN12385-5 /ISO 4344.