


GOVERNOR ROPES

8X19

Wire Rope with Polypropylene Core
8 Strands
Seale

BRUGG
Lifting

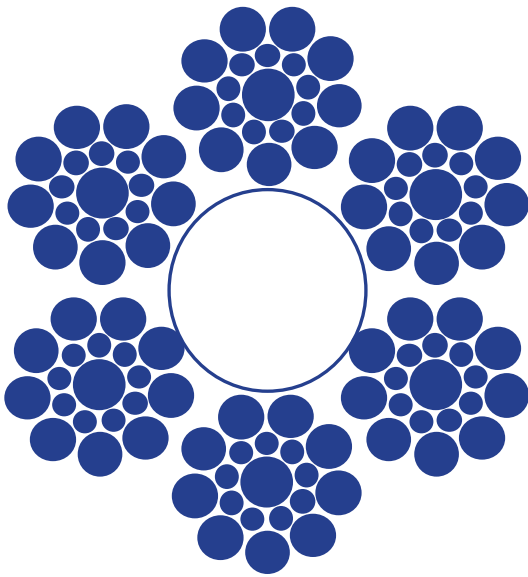

For high demands on elongation and corrosion protection with special rope lubrication

Elastic elongation

Permanent elongation

0.142%

0.22%

item number	rope ø		breaking load min.		weight		construction
	mm	in	kN	lbs	kg/100m	lb/ft	
61540	8.0	5/16	35,50	7981	20,97	0,1409	8x19S-SFC 1770 B sZ (RRL)
77513	9.5	3/8	50,30	11308	30,30	0,2036	8x19S-SFC 1770 B sZ (RRL)

Further nominal strengths and/or diameters (including imperial dimensions) on request. Rope diameter-tolerances according to EN12385-5/ISO 4344.